

AMP2113 SOLID STATE HIGH POWER AMPLIFIER

FEATURES

Designed for EMI/RFI, lab, CW/Pulse and all EW communication applications
 Small form factor, rack mounted system
 Class A/AB Linear design
 High Power Advanced technology devices
 Instantaneous ultra-wide bandwidth
 Built-in protection circuits, with extensive monitoring
 Local LCD & remote flexible interfaces
 High efficiency, with unprecedented reliability and ruggedness



ELECTRICAL SPECIFICATIONS: 50Ω, 25 °C

Parameter	Specification	Notes
Operating Frequency Range	10 - 2000 MHz	
Power Output @ Psat	20 Watt Min	CW or Pulse
Power Output @ 1dB G.C.P.	10 Watt Min	
Power Gain	+44 dB Min	0dBm or less for rated Pout
Power Gain Flatness	4.0 dB p-p Max	Constant input power
Input Return Loss	-10 dB Max	
2-Tone Intermodulation (IMD)	<-30 dBc Typ	33dBm/Tone, Δ = 1MHz
Harmonics	-20 dBc Typ	At rated Pout
Spurious	-60 dBc Max	Non-harmonics
Operating Voltage	100 - 240 VAC	
Power Consumption	250 Watt Max	At rated Pout
Input Power Protection	+5 dBm Max ¹	
Load VSWR Protection	4 : 1: Max ²	Foldback @ preset limit
Safety Interlock (BNC Female on rear)	Safety Interlock, Open=STBY/Short=RFON	Optional

1 Units with optional digital monitor and control, for basic units <10 Sec without damage

2 Units with optional digital monitor and control, for basic units <1 minute at rated Pout

ENVIRONMENTAL CHARACTERISTICS

Parameter	Specification	Notes
Operating Ambient Temperature	0 to +50°C	
Storage Temperature	-40 to +85 °C	
Relative Humidity	up to 95 %	Non-condensing
Altitude	3000 meters	
Shock & Vibration	Normal transport ³	

3 MIL Spec available for quotation


MECHANICAL SPECIFICATIONS

Parameter	Specification	Notes
Dimensions W x H x D	430 x 88 x 562 mm	*2U, excluding handles
Weight	9 kg.	
RF Conn. In / Out / Sample	N-Female	Front or rear panel
Interface Connector	9-Pin D-Sub	Rear panel
AC Power	IEC 60320-C14	Or equivalent
Cooling	Built in Fan Cooling	Variable speed
STANDARD: Digital Monitor & Control FWD, REV, VSWR, GAIN, ALC, V & I, TEMP	Ethernet RJ-45 TCP/IP, RS422/485, USB Optional GPIB Interface	*Optional Benchtop

e

AMP2113 SOLID STATE HIGH POWER AMPLIFIER

OUTLINE DRAWING
SHOWN WITH OPTIONAL LCD DIGITAL CONTROLLER

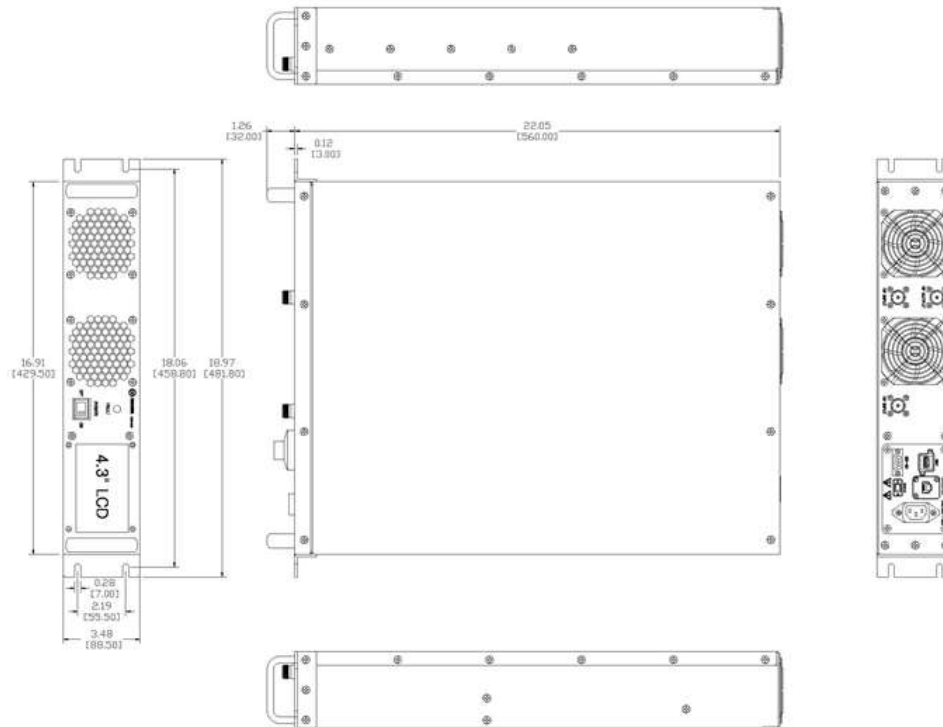

OUTLINE DRAWING
Optional Benchtop

